#### ZONE CHANGE REVIEW SHEET

**CASE**: C814-88-0001.10

Canyons @ Rob Roy Rezoning

**Z. P. C. DATE:** 11/05/13, 11/19/13, 12/03/13

ADDRESS: 800 N. Capitol of Texas Highway

**AREA:** 16.82 acres

APPLICANT: Brandywine Acquisition Partners, LP AGENT: Armbrust & Brown, L.L.P.

(Ralph Bistline)

(Amanda Morrow)

**NEIGHBORHOOD PLAN AREA:** N/A

**CAPITOL VIEW:** No

<u>T.I.A.:</u> Yes

**HILL COUNTRY ROADWAY:** Yes

WATERSHED: Bee Creek

**DESIRED DEVELOPMENT ZONE:** No

**ZONING FROM:** PUD - Planned Unit Development.

**ZONING TO:** PUD - Planned Unit Development.

#### SUMMARY OF STAFF RECOMMENDATION:

Staff recommends Planned Unit Development (PUD) zoning with the following changes to Exhibit "H" of the PUD Land Use Plan -

- Change the Overall Summary by General Land Use Table on Sheet 1 to reflect a change 1. from office use to multifamily use; adjust the acreages accordingly.
- Change the Land Use Summary Table on Sheet 1 to reflect the correct lot and change the 2. proposed land use from office to multifamily.
- Clarify Ordinance Compliance Note #1 on Sheet 2 to read "Single family residential areas 3. are limited to a density of one unit per two acres of gross site area, with minimum one acre lots."
- Change the Hill County Roadway Ordinance Calculations on Sheet 2 to deduct the site 4. area calculations of Lot A-1
- Change the F.A.R & Parking Summary Table on Sheet 2 to reflect Lot A-1 as a 5. multifamily project.
- Change the diagram on Sheet 2 for Lot A-1 from "LO" to "MF-2". 6.
- Remove the floor to area multiplier calculations and the allowable square footage 7. calculations on Sheet 3.
- Change the proposed impervious cover from 3.16 acres to 3.50 acres on sheet 3. 8.
- 9. Change the Impervious Cover Summary Table on Sheet 3 to reflect the proposed impervious cover and to account for a different building configuration and parking layout.

(3/2)

- Remove the Hill County Roadway Ordinance Table on Sheet 3.
- 11. Change the Comprehensive Watershed Ordinance Table on Sheet 3 to reflect the proposed impervious cover.
- 12. Remove the diagram on Sheet 3 of the office project.
- 13. Add a note on Sheet 3 that clarifies the maximum height allowed on Lot A-1 is 35 feet.
- 14. Remove the note on Sheet 3 that reads "Due to the pitch of the roof design and height limitations the square footage of the third story of this building will be reduced by approximately 50% from the first two stories.

#### PLANNING COMMISSION RECOMMENDATION:

#### **DEPARTMENT COMMENTS:**

The site is located at 800 North Capital of Texas Highway and is currently undeveloped. The property is part of the Davenport Ranch West Planned Unit Development (PUD) that was approved by ordinance number 890202-B on February 2nd, 1989. The Davenport Ranch West PUD consists of approximately 113.46 acres. This tract is known as Lot A-I, Tract D, Section 1 of the Davenport Ranch West PUD. The site is currently designed as "office" under the Davenport Ranch West PUD. The applicant proposes to amend the PUD to allow multifamily residential use of the Property in accordance with multifamily residence low density "MF-2" district. The project will consist of a maximum of 245 dwelling units with structured parking on 16.29 acres. The project will comply with the height and impervious cover allowances for the Property as originally proposed and shown on the land use plan. The staff is recommending approval of the change in land use since the proposed "multifamily" use is a less intense use than an "office" use as well as an overall vehicle trip reduction with the proposed "multifamily" use. In order to change the uses, the following changes need to be made to the PUD Land Use Plan. And they are as follows:

Exhibit "H" Land Use Plan. Change the Overall Summary by General Land Use Table on Sheet 1 to reflect a change from office use to multifamily use; adjust the acreages accordingly.

Justification. The Property was zoned for office use in 1988, since then it has remained undeveloped. West Austin lacks a sufficient supply of multifamily development for families looking to move to the area that otherwise might not be able to afford owning their own home. The few multifamily developments located in the surrounding area experience an occupancy rate of over 90%. Additionally, the proposed low density multifamily residential use provides a better transition between Capital Texas Highway located to the west and the residential uses located to the north and east of the site.

Exhibit "H" Land Use Plan. Change the Land Use Summary Table on Sheet 1 to reflect the correct lot and change the proposed land use from office to multifamily.

(3/3)3

Justification. The Property was zoned for office use in 1988, since then it has remained undeveloped. West Austin lacks a sufficient supply of multifamily development for families looking to move to the area that otherwise might not be able to afford owning their own home. The few multifamily developments located in the surrounding area experience an occupancy rate of over 90%. Additionally, the proposed low density multifamily residential use provides a better transition between Capital Texas Highway located to the west and the residential uses located to the north and east of the site.

Exhibit "H" Land Use Plan. Clarify Ordinance Compliance Note #1 on Sheet 2 to read "Single family" residential areas are limited to a density of one unit per two acres of gross site area, with minimum one acre lots."

Justification. As supported by Section 1.04 of the Restrictive Covenant recorded in Volume 10909, Page 1601 of the Real Property Records of Travis County, Texas for the Davenport Ranch West Planned Unit Development Section One, this restriction was intended to apply solely to single family residential development. I have attached a copy of the Restrictive Covenant for your reference with the companion Restrictive Covenant Amendment case.

Exhibit "H" Land Use Plan. Change the Hill County Roadway Ordinance Calculations on Sheet 2 to deduct the site area calculations of Lot A-1.

Justification. Per the Hill County Roadway Ordinance the floor to area limitations only apply to nonresidential buildings.

Exhibit "H" Land Use Plan. Change the F.A.R & Parking Summary Table on Sheet 2 to reflect Lot A-1 as a multifamily project.

Justification. The parking table only provides parking calculations associated with the office development on Tract D. Since the use is changing from office to multifamily we have updated the table accordingly.

Exhibit "H" Land Use Plan. Change the diagram on Sheet 2 for Lot A-1 from "LO" to "MF-2".

Justification. The Property was zoned for office use in 1988, since then it has remained undeveloped. West Austin lacks a sufficient supply of multifamily development for families looking to move to the area that otherwise might not be able to afford owning their own home. The few multifamily developments located in the surrounding area experience an occupancy rate of over 90%. Additionally, the proposed low density multifamily residential use provides a better transition between Capital Texas Highway located to the west and the residential uses located to the north and east of the site.

Exhibit "H" Land Use Plan. Remove the floor to area multiplier calculations and the allowable square footage calculations on Sheet 3.

Justification. Per the Hill County Roadway Ordinance the floor to area limitations only apply to nonresidential buildings.

Exhibit "H" Land Use Plan. Change the proposed impervious cover from 3.16 acres to 3.50 acres.



Justification. While the proposed impervious cover is slightly more than the previous office project, this project is still under the 3.52 acres of impervious cover allowed for Lot A-1.

Exhibit "H" Land Use Plan. Change the Impervious Cover Summary Table on Sheet 3 to reflect the proposed impervious cover and to account for a different building configuration and parking layout.

Justification. While the proposed impervious cover is slightly more than the previous office project, this project is still under the 3.52 acres of impervious cover allowed for Lot A-1. The prior office project proposed a vast amount of surface parking with a small building footprint. Since the use of the site is changing from office to multifamily the size and configuration of the building and parking area must also change to accommodate a more user friendly development. The proposal is to provide a wrapped product type with structured parking within.

Exhibit "H". Land Use Plan. Remove the Hill County Roadway Ordinance Table on Sheet 3.

Justification. Per the Hill County Roadway Ordinance the floor to area limitations only apply to nonresidential buildings.

Exhibit "H" Land Use Plan. Change the Comprehensive Watershed Ordinance Table on Sheet 3 to reflect the proposed impervious cover.

Justification. While the proposed impervious cover is slightly more than the previous office project, this project is still under the 3.52 acres of impervious cover allowed for Lot A-1.

Exhibit "H" Land Use Plan. Remove the diagram on Sheet 3 of the office project.

Justification. Zoning is used to establish the best use for a site and should not be used to dictate the location of site improvements. This should be deferred to the site development stage when engineered documents and related reports are available to assess the proper location of improvements based on site constraints. Also by removing the diagram from the land use plan it prevents future amendments to the PUD should the location of the site improvements fluctuate slightly.

Exhibit "H" Land Use Plan. Add a note on Sheet 3 that clarifies the maximum height allowed on Lot A-1 is 35 feet.

Justification. There is no change from the previous proposal.

Exhibit "H" Land Use Plan. Remove the note on Sheet 3 that reads "Due to the pitch of the roof design and height limitations the square footage of the third story of this building will be reduced by approximately 50% from the first two stories.

Justification. This note is unnecessary since the building is limited to 35 feet with height limit exceptions, as prescribed by 25-2-531 of the City Code, for certain architectural elements including pitched roof designs.

#### **BASIS FOR RECOMMENDATION:**

Zoning changes should promote compatibility with adjacent and nearby uses. 1.

Granting PUD zoning to change the land use from "Office" to "Multifamily" for the subject tract will be compatible with adjacent uses and adjacent zoning in the area to the north and west and act as a buffer for

#### EXISTING ZONING AND LAND USES:

	ZONING	
SITE		LAND USES
NORTH	PUD PUD	Undeveloped
SOUTH	LO LO	Single family residential
EAST	SF-2	Office complex
WEST	SF-2	Undeveloped
SE HISTORIES:		Single family residential

#### **CASE HISTORIES:**

CASE NUMBER	REQUEST	PLANNING COMMISSION	
C14-93-0060	From SF-2 to P	Approved P [Vote: 7-0]	Approved P
C14-98-0180	From RR to SF-1	Approved SF-1 [Vote: 7-0]	Approved SF-1
NEIGHBORHOO	D ORGANIZATION		[Vote: 7-0]

#### NEIGHBORHOOD ORGANIZATION:

- Austin Neighborhood Council
- Rob Roy HOA, Inc.

#### **SCHOOLS:**

Bridge Point Elementary School West Ridge Middle School West Lake High School

#### SITE PLAN:

SP 1. Site plans will be required for any new development other than single-family or duplex residential.



- SP 2. Any development which occurs in an SF-6 or less restrictive zoning district which is located 540-feet or less from property in an SF-5 or more restrictive zoning district will be subject to compatibility development regulations.
- SP 3. There is currently a site plan application in review for office development on this tract, case number SPC-2013-0214C. Upon approval of this PUD Land Use Plan amendment to multifamily, the office site plan case must be withdrawn.

#### **ENVIRONMENTAL:**

1. The site is not located over the Edwards Aquifer Recharge Zone. The site is in the Bee Creek Watershed of the Colorado River Basin, and is classified as a Water Supply Rural Watershed by Chapter 25-8 of the City's Land Development Code. It is in the Drinking Water Protection Zone. Under the current watershed regulations, development or redevelopment on this site will be subject to the following impervious cover limits:

D 1			- do voi innits.
Development Classification One or Two Family	% of Net Site Area	% NSA with Transfers	Allowable Density
Residential	n/a	n/a	1 unit/2 acres net site
Multifamily Residential Commercial	20%	25%	area n/a
0' 1 0	2070	25%	n/a

- 2. Single family or duplex development within a Water Quality Transition Zone may not exceed a density of one unit per three acres, exclusive of land within a 100-year floodplain, and must have a minimum lot size of 2 acres.
- 3. According to flood plain maps there is no flood plain in or within close proximity of the project location.
- Standard landscaping and tree protection will be required in accordance with LDC 25-2 and 25-8 for all development and/or redevelopment.
- 5. Numerous trees will likely be impacted with a proposed development associated with this rezoning case. Please be aware that an approved rezoning status does not eliminate a proposed development's requirements to meet the intent of the tree ordinances. If further explanation or specificity is needed, please contact the City Arborist at 974-1876. At this time, site specific information is unavailable regarding other vegetation, areas of steep slope, or other environmental features such as bluffs, springs, canyon rimrock, caves, sinkholes, and wetlands.
- 6. Under current watershed regulations, development or redevelopment on this site will be subject to providing structural sedimentation and filtration basins with increased capture volume and 2 year detention.

(3)

7. The land use plan currently includes a map showing proposed commercial development along with undisturbed areas / downstream buffers. This map is proposed to be removed from the land use plan. If this map is to be removed, notes or a replacement map illustrating the undisturbed areas / downstream buffers must be added to the land use plan. The undisturbed areas / downstream buffers must be clearly shown in the land use plan revision.

#### TRANSPORTATION:

TR1. The Transportation Review Section has no objections to the proposed PUD amendment since the estimated traffic generation for the proposed MF-2 land use will be significantly less than the currently approved Office land use.

#### **COMPREHENSIVE PLAN:**

The Canyons at Rob Roy (a 16.29 acre parcel) is part of the Davenport Ranch PUD, which is a 444 acre mixed use project, containing single family houses, condos, multi-family apartments, offices, commercial land uses, and the St. Stephens School. The property is not located in the boundaries of an area with an adopted neighborhood plan and is located to the west of N. Capital of Texas Highway, south of Pascal Lane and east of St. Stephens School Road. The request is to construct a 245 unit multi-family apartment complex.

#### Imagine Austin

The following Imagine Austin policies are taken from Chapter 4 of the IACP, which specifically discusses mixed use development and promoting a compact and connected city:

- LUT P3. Promote development in compact centers, communities, or along corridors that are
  connected by roads and transit that are designed to encourage walking and bicycling, and
  reduce health care, housing and transportation costs.
- LUT P5. Create healthy and family-friendly communities through development that includes
  a mix of land uses and housing types and affords realistic opportunities for transit, bicycle,
  and pedestrian travel and provides both community gathering spaces, parks and safe outdoor
  play areas for children.
- N P1. Create complete neighborhoods across Austin that have a mix of housing types and land uses, affordable housing and transportation options, and access to schools, retail, employment, community services, and parks and recreation options.

Based on the property being located within a project that is developing into a complete community with a variety of residential and commercial uses, and the Imagine Austin policies above that promote complete communities, staff believes that this proposed project is supported by the Imagine Austin Comprehensive Plan.

(3/4)

CITY COUNCIL DATE: December 12th, 2013

**ACTION:** 

ORDINANCE READINGS: 1ST

ST.

3<sup>RD</sup>

**ORDINANCE NUMBER:** 


CASE MANAGER:

Clark Patterson


Clark.patterson@ci.austin.tx.us


2<sup>ND</sup>


**PHONE:** 974-7691

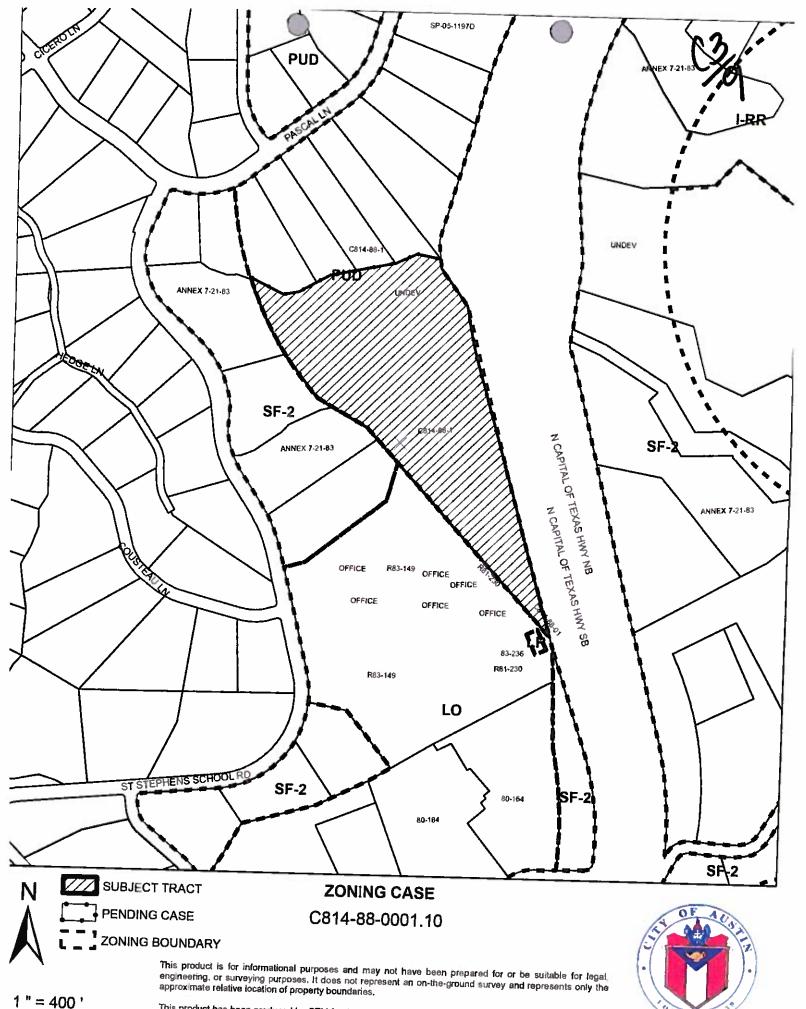

This product has been produced by CTM for the sole purpose of geographic reference. No warranty is made by the City of Austin regarding specific accuracy or completeness.

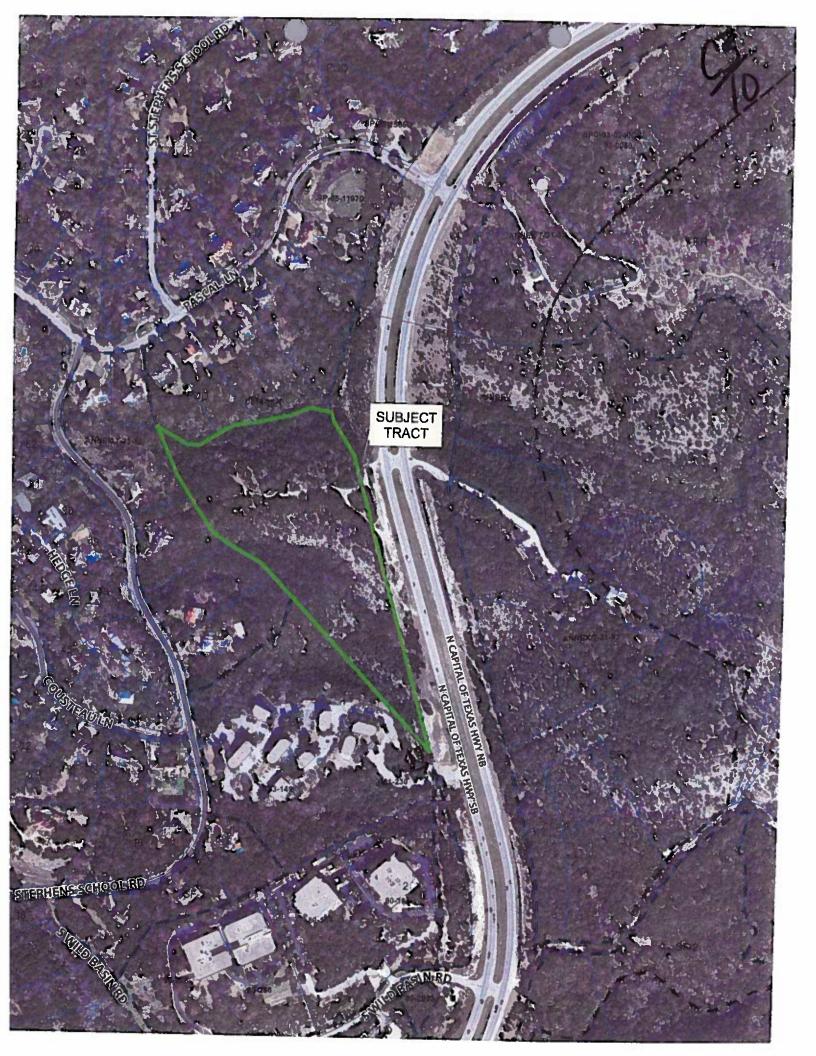


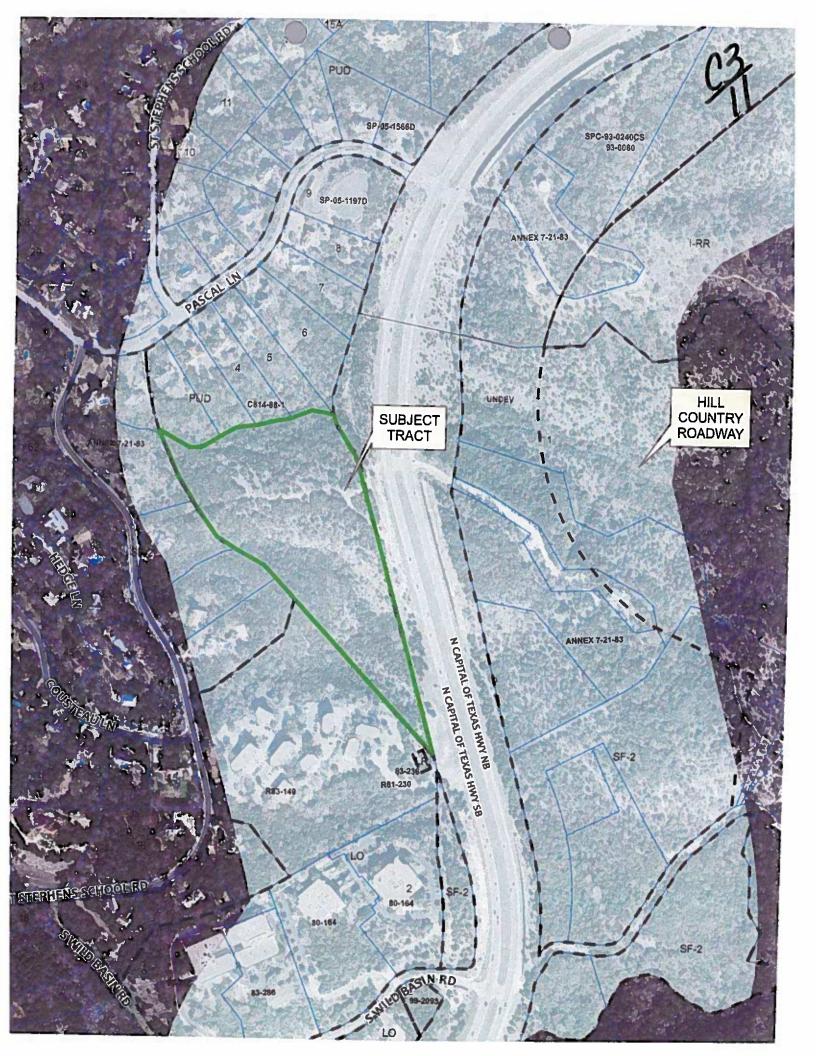

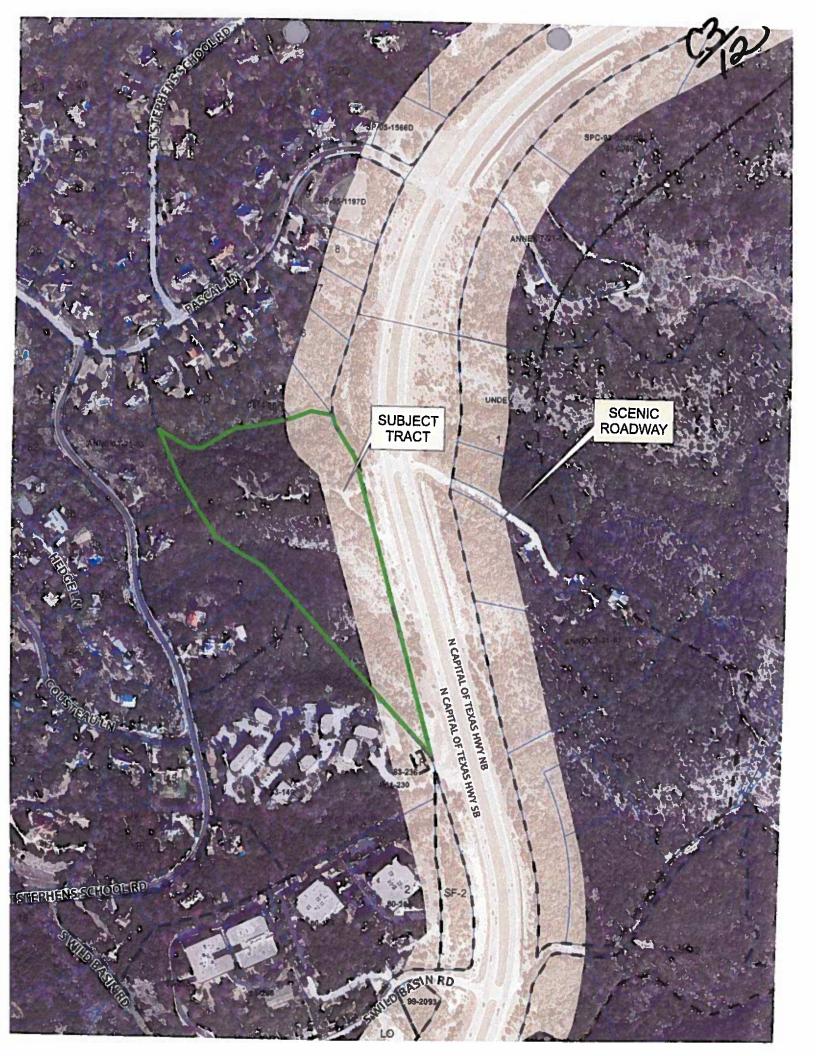







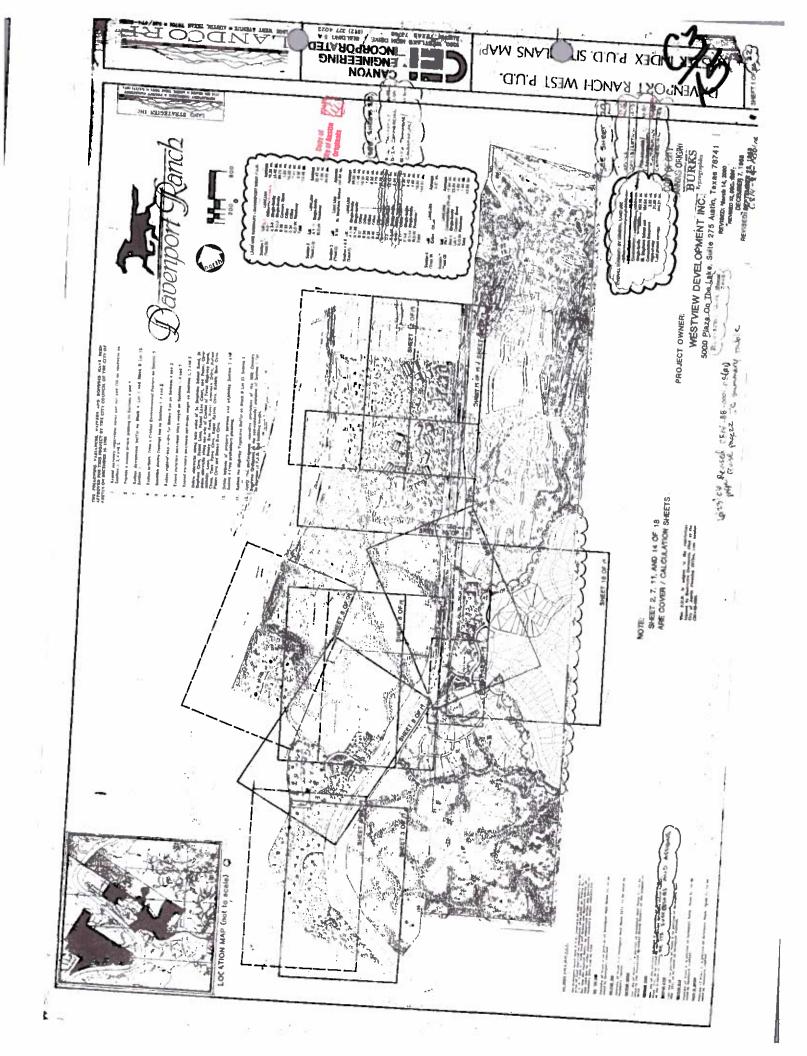


ADCO BE PLANNED UNIT DEVE OPMENT RACT D & TRACT C-3 CANYON ENGINEERING INCORPORATI DAVENPORTERANCH WEST APPROVAL BOX WESTVIEW DEVELOPIN SECTION 1 FIELD NOTES TRACT OF -- SECTION 1/ TRACT C-3 - SECTION 2 INFORMATION The second second The same of the sa The state of the s TYPICAL NOTES Address when the second Copies of the district time of the second 新石谷四百里里 TYPICAL PARKING BAY MASTER BUDEX & SURBOUNDING LAND USE MAP (Stare 1'830 OVERALL ORDINANCE INFORMATION TRACT 0 LOCation Map (nia.) CONTHOLLING OF






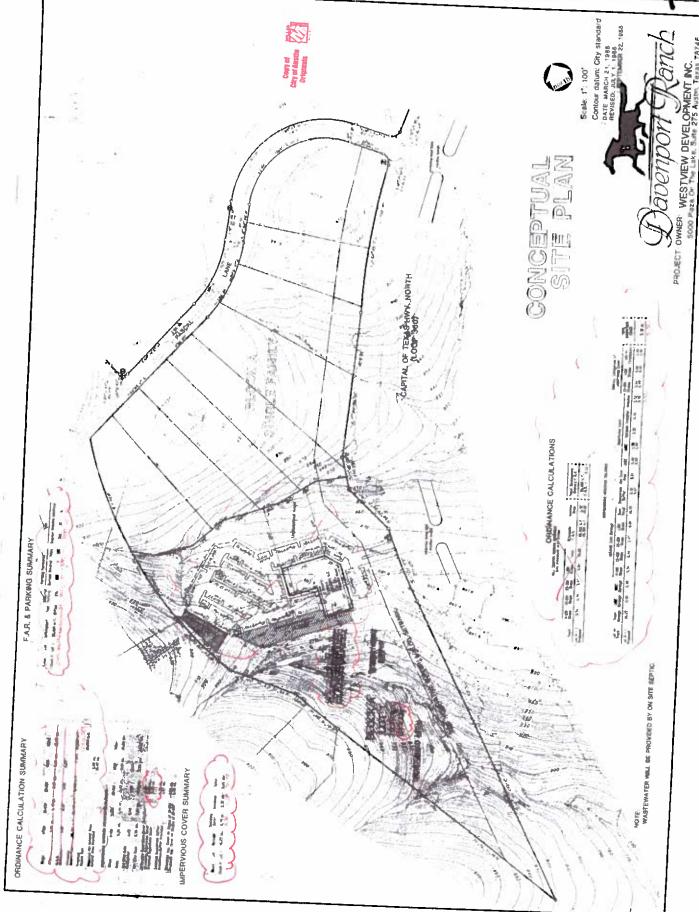

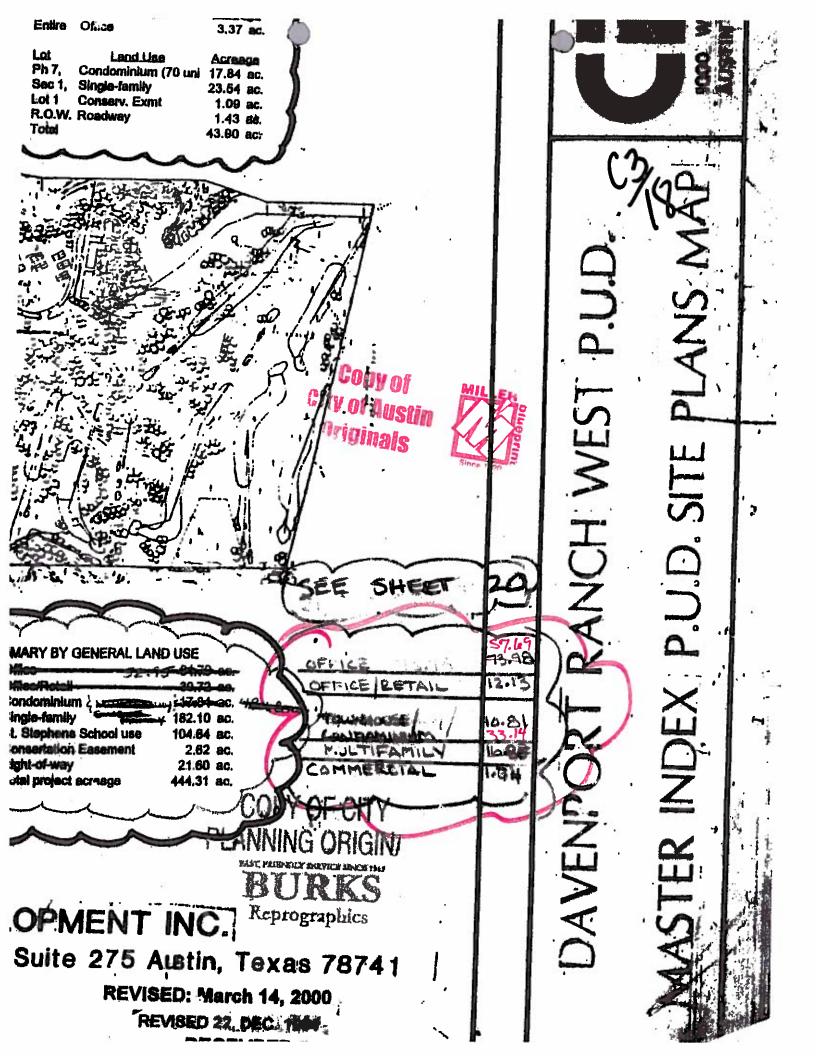







#### LAND USE SUMMARY - DAVENPORT WEST 2 U.D.

Section (Tract D)	B 33 B 34	Land Lise Office multifactor Slogic family Single-lamily Conserv. Exmit Office Office Roadway	Acreson 16.29 sc. 18.48 ac. 58.73 ac. 1.53 ac. 10.00 ac. 7.41 ac. 3.02 ac. 113.48 ac.
Section 2	Lot	1 1113	

Section 2 (Tract C-3)	Lot A 1 17 R.O.W.	Land Use Single-family Roadway	Acreage 32,47 ac. 1.56 ac.
			34.03 ac


Section 3 (Tract C)	Lot 8 35	Land Lise - St. Stephens School	Acresge	
		The second second	IVT DE AC	

Section 4 & (Tract F)	A 1-18 B 1-38 B 37 B 38 B 39 B 40	Land Lise Single-family Single-family Office Office Office Office	Acreage 20.20 ac. 11.45 ac. 10.56 ac. 1.83 ac. 4.56 ac. 3.78 ac.
	<b>担41</b>	Office	9,70 BG,

LAND STRATEGIES INC.

NON

SEE SHEETE 2

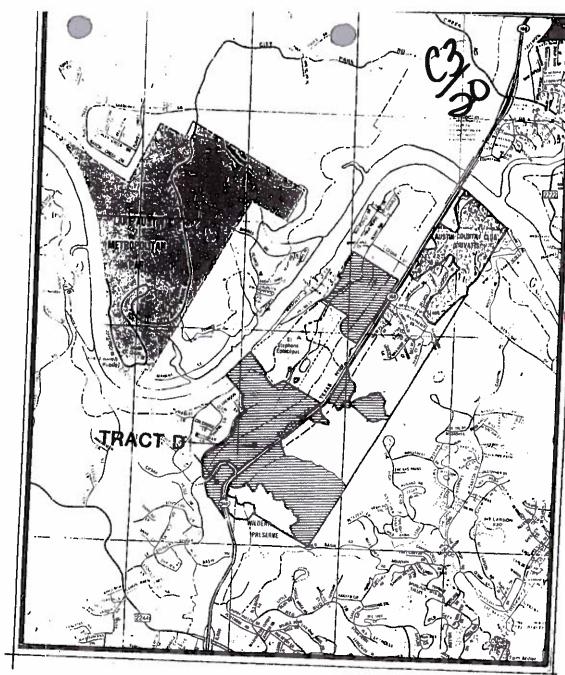

Location Map (n.t.s.)



# CONTROLLING ORDINANCES

#### Controlling Ordinances

Comprehensive Watershed Ordinance, as modified by the First Amendment to the inference Concerning Creation and Operation of Davenport Reach W.U.D. (First Amendment)

Hill Country Roadway Ordinance (Low Intensity)

#### Ordinance Compliance Hotes

- residential areas are limited to a density of one unit per two acres of gross site area, with minimum one acre lots.
- Submission of detailed site plans, landscape plans and tree surveys will be postponed until first site development persitting, in accordance with the First Amendment.
- Required parkland will come from Tract A-1 as depicted on Exhibit A of the First Amendment.

## TRACTO - SECIN

## OVERALL ORDINANCE INFORMATION

# (3)

HTEL COUNTRY ROSDMORY ORDINANCE CALCULATIONS (Low Intensity with Bonu	น้าเส "เกเพายง	RIVEDMIDAY	DRDINANCE	CALCULATIONS	(Low	Intensity	with	Bonus
---	----------------	------------	-----------	--------------	------	-----------	------	-------

Slope 0-151-8	15-25% 25-35% 35% Total
Area 16-82 acc	10.59 ac. 4.77 ar. 1.52 ac. 33.70 ac.
F.A.R. Multiplier 0.25	0.08 0.04 0.00
Allowable 122,839.20 Square, Feet 183, 170 s.f. Proposed Square feet	11/10/
Required 40% Natural Area	13.48 ac.
Natural Area Provided	19.57 ac.

#### COMPREHENSIVE MATERSHED ORDINANCE CALCULATIONS (Includes=R#O:W. of Santa Anita Cove)

Slope	0-15%	15-25%	25-35%	.) 35%	Total
Area	18.55 ac.	10.98 at.	4.77 ac-	1.52 ac.	35.82 ac.
Net Site Area Multiplier	1.00	0.40	0.20	0.00	
Net Site Area	18.55 ac.	4.39 ac.	0.95 ac.	0.00 at.	23.90 ac.
Allowable Imperviolationable Imperviolation	yious Cover -	ultiplier	0.40 9.56 ac. 9.44 ac.	Ē.	
Required Downst Downstream Buff	ream Buffer		13.48 ac. 10.69 ac.		

#### IMPERVIOUS COVER TRANSFERS

(For R.O.W. transfers only)

LOT	PLLOHOBLE	PROPOSED	REMAINING
A-1 B-33	2.88 ac. 2.57 ac.	2.67 ac. 2.39 ac.	0.21 ac. 0.18 ac.
9-33 B-34	2,29 ac.	2.11 ac.	0.18 ac.
" TOTAL	7.74 ac.	7.17 ac.	0.57 ac.
		36.0	REDUIRED
R.O.W.	, ALLOWABLE	PROPOSED	TRANSFER
0-15%	0.71 ac.	0,91 ac.	0.20 ac.
15%	0.04 ac.	0.41 ac.	0.37 ac.
TOT	TRINGFER	REQUIRED	0;57 ac.
TOT	A. TRANSFER	AVAILABLE	0.57 ac-

- 1. The 125 and 100
- 2. Subdivision is class frainage or waster Standards.
- 3. Roadways will be c
- 4. All access to state acquired before fin:
- 5. Water and Wastewa
- 6. All greenbelts, pul essemen s will be association.
- 7. Access 1) drainage public streets.
- 8. Property owner she be necessary and sh
- 9. No buildings, fenwithin any draining by the City of Aus
- 10. There will be no drainage, or recreat
- 11. Prior to constructi and Travis County by ponding or oth aite plans for appre
- 12. The responsibility facilities lies with the facilities are k
- 13. Parking structure approval prior to a
- 14. The Austin Fire I or concrete as an
- 15. The required wit manner, including appropriate netice shall be maintaint


#### **TYPICAL**

3,x 3,x

RECUL



ROB ROY NEIGHBORHOOD

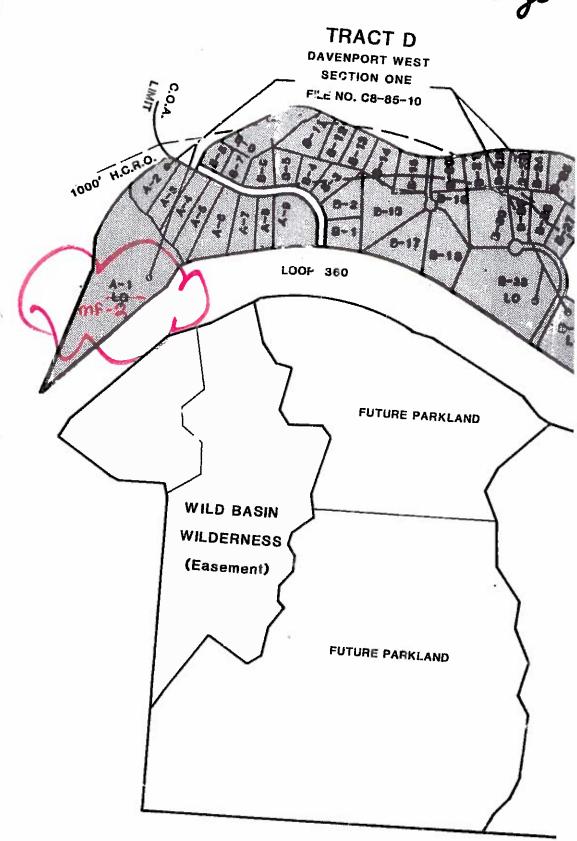

MF

# ORDINANCE CALCULATION SUMMARY



Slope	0-15x	15-25x				2000
Area	10	137can 6.44 jp	25-35x	). <u>}5</u> x.	Total	
P.A.R. Hultiplier	0.25	0.01	3. 47 ac. 0. 04		16.29 at	
Allowable Square Eest	~60,331 <b>~</b>	A STATE OF THE PARTY OF THE PAR	· ·	0.00	2.4	4
Proposed Square feet		:	6,016 s. F.	0 s.f.	424 20	Ď
Required 40% Na Natural Area Pro	Ovided			6.52 ac. 10.02 ac.	-88,800 sif.	100
COMPREHENSIVE W	TERSHED ORD	INVINCE COLCULA	ÁTIONS		V 1	
Slope Area	0-15% 5.54 ac.	5-25% 6,44 ac.	25-35# 3,47, ac.	)35x		
Net Site Area Multiplier	1-00	0.40	0.20	0.84 ac.	16.29 ac.	
Not Site Area	5.54 ac.	2.50 ac.	0.69 ac.	0.00 ac.	8.81 ac.	
Allowable Impervi Allowable Impervi Proposed Impervio	ous Cover N. ous Cover us Cover	#iplier 🖑	0.40 3.52 ac.		0.01 ac.	-
Required Downstre Downstream Buffer	Buffer Provided		6.52 ac. 4.67 ac.	Ú		1
Allowable Imp. Covernoposed Imp. Cove	er on Slopes on Sloves	of 15-251 of 15-251	0.64 ac. 0.49 ac.	*		

## IMPERVIOUS COVER SUMMARY

Block	Lot	Acreage	Building Cover	Pavement	Total
Block A	Lot 1	16.29 ac.	0.79 c.	2.37 ac.	

016

006

# ORDINANCE CALCULATION SUMMARY



Slope 0-15x	i is one	ile n		A STATE OF THE STA	mr.
1.053	Cirror (C.M.)	25-35x	).35 <sub>%</sub> .	Total	÷
P.A.R. Hultiplier 0.25		2	0, 84 ac.	15.29 ac.	٠
Allowable Square Feet 60,331 s.	Committee of his	0.04	0.00	į.	4
Proposed Square feet	** <del>*****</del> ** \$6*	r. 6.046 s.f.	0 s.f.	88, 819 5.4.	`
Required 40% Natural Area Natural Area Provided			6.52 ac. 10.02 ac.	887800 SIF	
COMPREHENSIVE MATERSHED DRD Slope 0-15x	E	ÁTIONS .	35		5
Area 5.54 ac.	/5-25% 6,44 ac.	25-35x	)35x	Total	
Net Site Area Multiplier 1-00	0.40	3,47 ac.	0.84 ac.	16.29 ac.	
Not Site Area 5.54 ac.	2.5A ac	0.69 ac.	0.00 ac.	8.81 ac.	58
Allowable Impervious Cover N. Allowable Impervious Cover Proposed Impervious Cover	itiplier .	0.40 3.52 ac.	RSV	o. o. ac.	N. P.
Required Downstream Buffer Downstream Buffer Provided	2 k (c	6.52 ac.	50		1
Proposed Imp. Cover on Slopes Proposed Imp. Cover on Slopes	of 15-25% of 15-25%	4.67 ac. 0.64 ac. 0.49 ac.	2		- Chester

# IMPERVIOUS COVER SUMMARY

. Block	Lot	Acreage	Building Cover	Pavesent	Total
Block A	Lot 1	16.29 ac.	3.30	2.37 20	

026

# ORDINANCE CALCULATION SUMMARY



Slope Area	0-15x 5. 54 a	15-25x	25-35x	).35%	Total
P.A.R. Multiplier	0. 25	• 77	0.04	orby ac,	16.29 ac.
Allowable Square fixet	≈	f. 22 44 2 1		0.00	Ų.
Square feet		i grande	DIVID E. F.	0 s.f.	434.20
Required 40% Natural Area Pr	itural Area ovided			6.52 ac.	88,800 sif.
COMPREHENSIVE N	ATERSHED ORD	INANCE CALCULA	ITIONS	10.02 ac.	
Slope Irea	0-15% 5.54 ac.	5-25x	25-351	)35x	Jotal
et Site Area ultiplier	1-00	6,44 ac.	3.47 ac.	0.84 ac.	16.29 ac.
ot Site Area	5.54 ac.	2.58 ac	0.69 ac.	0.00 ac.	0.04
llowable Impervi lowable Impervi oposed Impervio	us Cover	tiplier	0.40 3.52 ac.		8.81 ac.
quired Downstre Wistream Buffer	Buffer Provided	. 7.	6.52 ac.	50	
owable Imp. Cove	• • • • • • • • • • • • • • • • • • • •	of 15-25%	0.64 ac. 0.49 ac.		

# IMPERVIOUS COVER SUMMARY


Block Block A	Lot Lot 1	Acreage 16.29 ac.	Building Cover 40-79-ac- 3-30	Pavement 2.37 ac.	Total
				**	0100


026


16,29	1		Uplands Zone Acreage	Uplands Zone Acreage	5.54 6.44 3.47 0.84 16.29 88,800 s.f. Uplands Zone Acreage	0-15% 15-25% 25-35% )35% Pallowable Slope Slope Slope Slope Total F.A.R. 5.54 6.44 3.47 0.84 16.29 88,819 5.7. 5.54 6.44 3.47 0.84 16.29 88,800 5.7.	HILL_COUNTRY ROADWAY ORDINANCE (Low Intensity with Borus)  0-15% 15-25% 25-35% }35% Allowable Slope Slope Slope Fotal F.R.R.  5.54 6.44 3.47 0.84 16.29 88,800 s.f. 88,800 s.f.
3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	0.000	impervious Cover	COMPREDENSIVE WATERSHED ORDINONCE	02 * F, A, B, = 0, 13 *	 	· ·	ORDINANCE CALCULATIONS
3-16 0.49 0.00 0.00 + 3-16-an	Slopes Slopes Floo	eryious Cover	Special Categories of				

" ≥ 968

	10 to			1		Li channa	Droposed	Tract		-	5		•	(		, 5	968	
28	Acreage	1				- 1	5,54	Slope	0-154	The Catholina	S	).			•			
0.00	Acreage Acreage	7407				:: ::::	5 \$	Stope	1		•	Jan .						
0,00	Acreage	109Z				**	3,47	1	25-35		1					-	11	-
5.¥	Slope	- 1					0.84	1	331	1	HILL COUNTRY ROADWAY ORDINANCE						.,-	
6. ₩	1	15-23	Upland				16.63	136			IL COUNTRY ROADWAY ORDINAN		1	į				
3,47	Stobe	25-25 25-25	Uplands Zone Horeage	,			86, 86	HO 04	Allowable F.A.R.	1000	h Bonus)	ORD	ζ.					
0, 84	adore	354	affe.		3		86,800 s.f.	*			111	NAN						
6.29		100		SACTION S	Manager Manager		0.00 0.00	6.52	Natural Prea	Table Comment		CE	1					
* P		Downstream	•		oc unter		F. A. R.	88.80	Overal			CAL						
9		Net Site		. [	PAGNICAL CARRESTON OF CALCALORS		0,13	0 s. f.	Overall F.A.R		-	ORDINANCE CALCULATION	1					
0.00	3	CHOZ			ACH!		* *	* 4	***	<b>.</b>	,	A	i					
0.5	0	W. 1	iupe				1		9-		- , ,	V	5					
1	3.50	Uplands Transfer Maximum	impervious Cover				ti											
	0.00	ransfer	/er						J									
3-16-	 55						1											
3-16 0.49	0.64	Slopes Slopes	15 Off	Special														
0.00	- 1		ž.	Tapervious Cover														
0,00	0.00	Floodplain		es or	•	X	- 7											
		SW.																

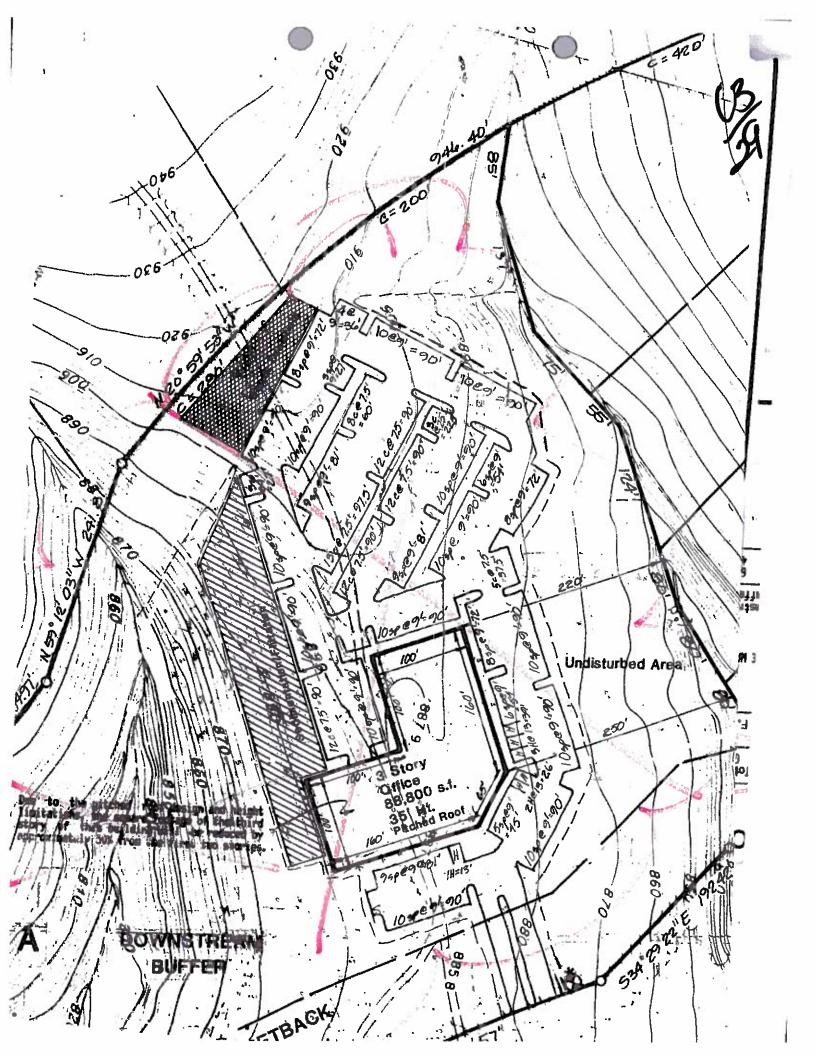

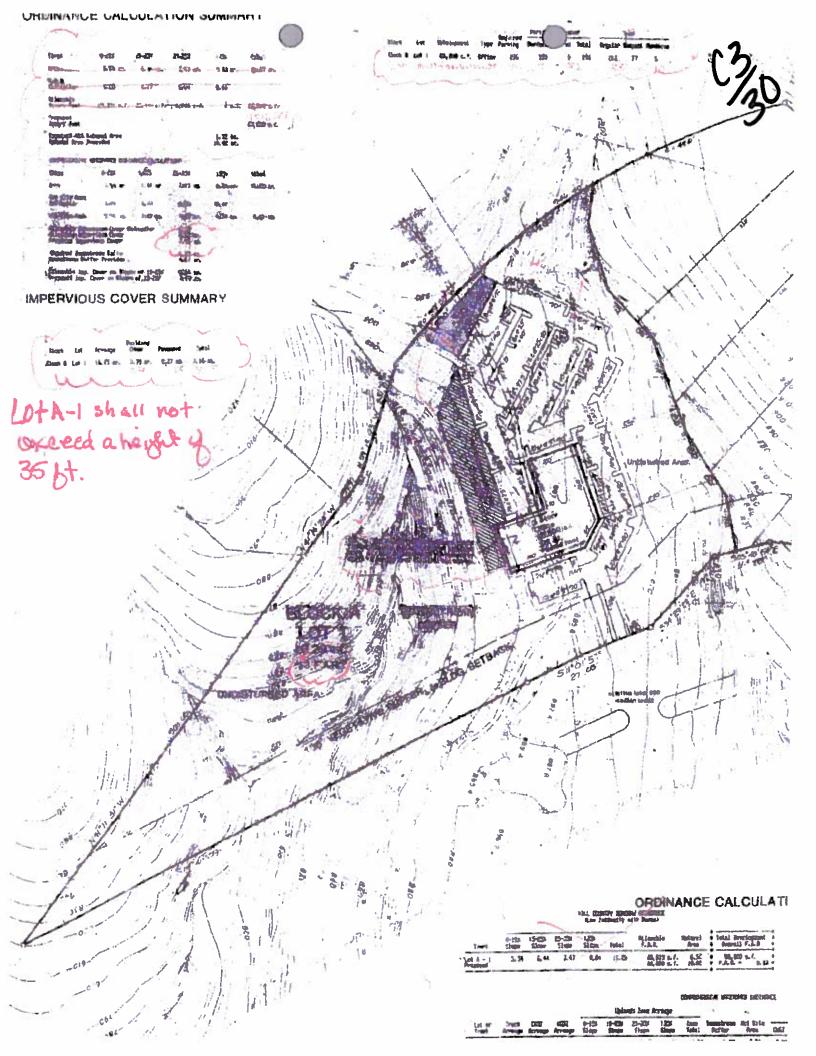

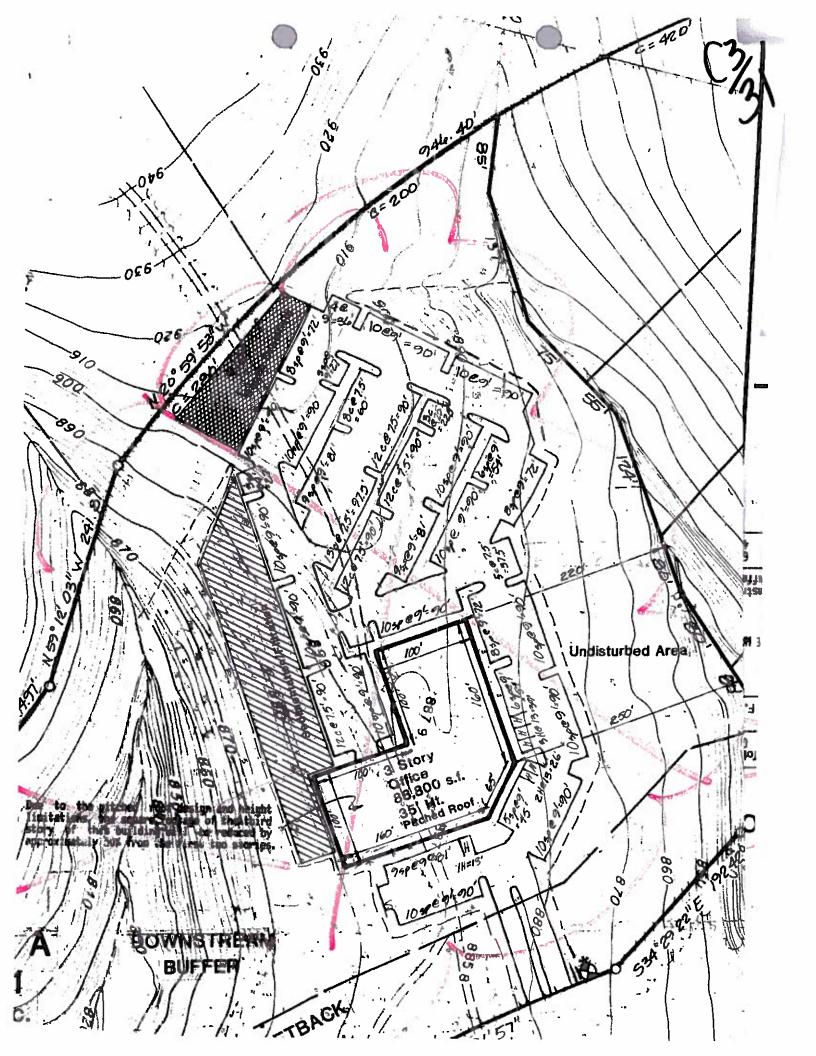

C/37

Written comments must be submitted to the board or commission contact person listed on the notice) before or at a public hearing comments should include the board or commission's name, the	scheduled
date of the public hearing, and the Case Number and the contact listed on the notice.	
Case Number: C814-88-0001.10 Contact: Clark Patterson, 512-974-7691 Public Hearing: Nov 5, 2013, Zoning and Platting Commiss Dec 12, 2013, City Council	ion
Sandra Ferguson  Your Name (please print)  Table 1501	m in favor bject
Your address(es) affected by this application  Landia Language  Signature	27, 20/3 Date
Daytime Telephone:	
J	
If you use this form to comment, it may be returned to: City of Austin Planning & Development Review Department Clark Patterson P. O. Box 1088 Austin, TX 78767-8810	

# PUBLIC HEARING INFORMATION

This zoning/rezoning request will be reviewed and acted upon at two public hearings: before the Land Use Commission and the City Council. Although applicants and/or their agent(s) are expected to attend a public hearing, you are not required to attend. However, if you do attend, you have the opportunity to speak FOR or AGAINST the proposed development or change. You may also contact a neighborhood or environmental organization that has expressed an interest in an application affecting your neighborhood.

During its public hearing, the board or commission may postpone or continue an application's hearing to a later date, or may evaluate the City staff's recommendation and public input forwarding its own recommendation to the City Council. If the board or commission announces a specific date and time for a postponement or continuation that is not later than 60 days from the announcement, no further notice is required.

During its public hearing, the City Council may grant or deny a zoning request, or rezone the land to a less intensive zoning than requested but in no case will it grant a more intensive zoning.

However, in order to allow for mixed use development, the Council may add the MIXED USE (MU) COMBINING DISTRICT to certain commercial districts. The MU Combining District simply allows residential uses in addition to those uses already allowed in the seven commercial zoning districts. As a result, the MU Combining District allows the combination of office, retail, commercial, and residential uses within a single development.

For additional information on the City of Austin's land development process, visit our website:

If you use this form to comment, it may be returned to:

Planning & Development Review Department

Clark Patterson P. O. Box 1088

City of Austin

Austin, TX 78767-8810

www.austintexas.gov

Winner 6 200 - 9 Few and 3 Jan - 7 portion of grantell How putery well some great well well Done THE HY HAND WHILL BY BELT TOTAL HOLD ONLY ☐ I am in favor comments should include the board or commission's name, the scheduled Competion sent This alse seguntational Jantimen 1 111/10 UdditimellTubpiverIduppmulfaalagatareet Completer Written comments must be submitted to the board or commission (or the Comments: 1 ke pugand dulle proupt by 1. Leguille date of the public hearing, and the Case Number and the contact person contact person listed on the notice) before or at a public hearing. Your 🗹 I object Public Hearing: Nov 5, 2013, Zoning and Platting Commission EDWARD WASHARDN NEUSEL Dec 12, 2013, City Council Daytime Telephone: 512 382 1406 Contact: Clark Patterson, 512-974-7691 Your address(es) affected by this application 14 PASCALLN 18746 Case Number: C814-88-0001.10 Signature Edward a. well Leguant This property Your Name (please print) listed on the notice.